

GPJ09 Closure

GPJ09 Series Fiber Distribution Box


GPJ09 fiber access termination closure is able to hold up to 16-24 subscribers and 96 splicing points as closure. It is used as a splicing closure and a termination point for the feeder cable to connect with drop cable in FTTx network system. It integrates fiber splicing, splitting, distribution, storage and cable connection in one solid protection box.

Features

- Water-proof design with IP-68 Protection level.
- Integrated with flap-up splice cassette and adaptor holder. Impact test: IK10, Pull Force: 100N, Full rugged design
- All stainless metal plate and anti-rusting bolts, nuts.
- Fiber bend radius control more than 40mm. Suitable for the fusion splice or mechanical splice. 2 pcs of 1*8 Splitter can be installed as an option.
- Mechanical sealing structure and mid-span cable entry.
- 16 ports cable entrance for drop cable.
- 24 adaptors for drop cable patching.



Specification

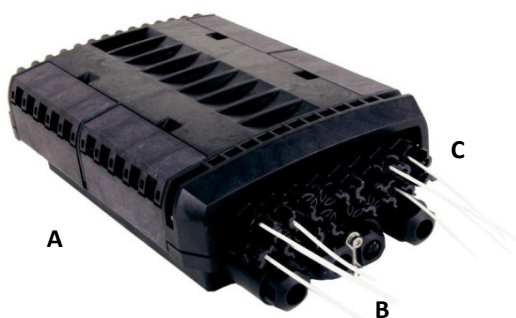

Item	Parameter
Dimension (mm)	(A) 385x (B) 245 x (C) 130
Splice capacity	Maximum 96F
Splitter type	PLC Splitter
Number of splitters	Max. 4 pc.
Colour	Black
Operating Temperature (°C)	-25~+75