

F-12 Closure

F-12 Series Fiber Distribution Box

The equipment is used as a termination point for the feeder cable to connect with drop cable in FTTx communication network system. The fiber splicing, splitting, distribution can be done in this box, and meanwhile it provides solid protection and management for the FTTx network building.

Features

- Total enclosed structure.
- Material: PC+ABS, wet-proof, water-proof, dust-proof, anti-aging, protection level up to IP55.
- Clamping for feeder cable and drop cable, fiber splicing, fixation, storage, distribution, etc. all in one.
- Cable, pigtailed, patch cords are running through own path without disturbing each other, cassette type SC adaptor installation, easy maintenance.
- Support 12 drop cables.
- Distribution panel can be flipped up, feeder cable can be placed in a cup-joint way, easy for maintenance and installation.
- Cabinet can be installed by the way of wall-mounted or poled-mounted, suitable for both indoor and outdoor uses.



Specification

Item	Parameter
Dimension (mm)	225*200*65
Splice capacity	Maximum 18 F
Splitter type	PLC Splitter
Number of splitters	Max. 2 pc.
Colour	Gray
Operating Temperature (°C)	-25~+75




Part numbers

P/N	Description	Accessories		
		SC/APC adaptor	SC/APC pigtail	1:4 PLC splitter 4xSC/APC out.
FH-DB-F12-000000-8C	F-12 Fiber Distribution Box (empty)	0	0	0
FH-DB-F12-0002-4PT	F-12 Closure w. 4 SC/APC pigtail preassembled	4	4	0
FH-DB-F12-0402-4C	F-12 Closure w. 1:4 PLC splitter preassembled	4	0	1
FH-DB-F12-0402-8D	F-12 Closure w. 2x1:4 PLC splitter preassembled	8	0	2
FH-OA-F12-CE-3.0	Sealing block for F-12 drop cable entrance	Spare parts		
FH-OA-F12-PT-3.0	Ariel Drop 3.0mm Cable protection tube for F12	Spare parts		

F-12 Closure

Product details

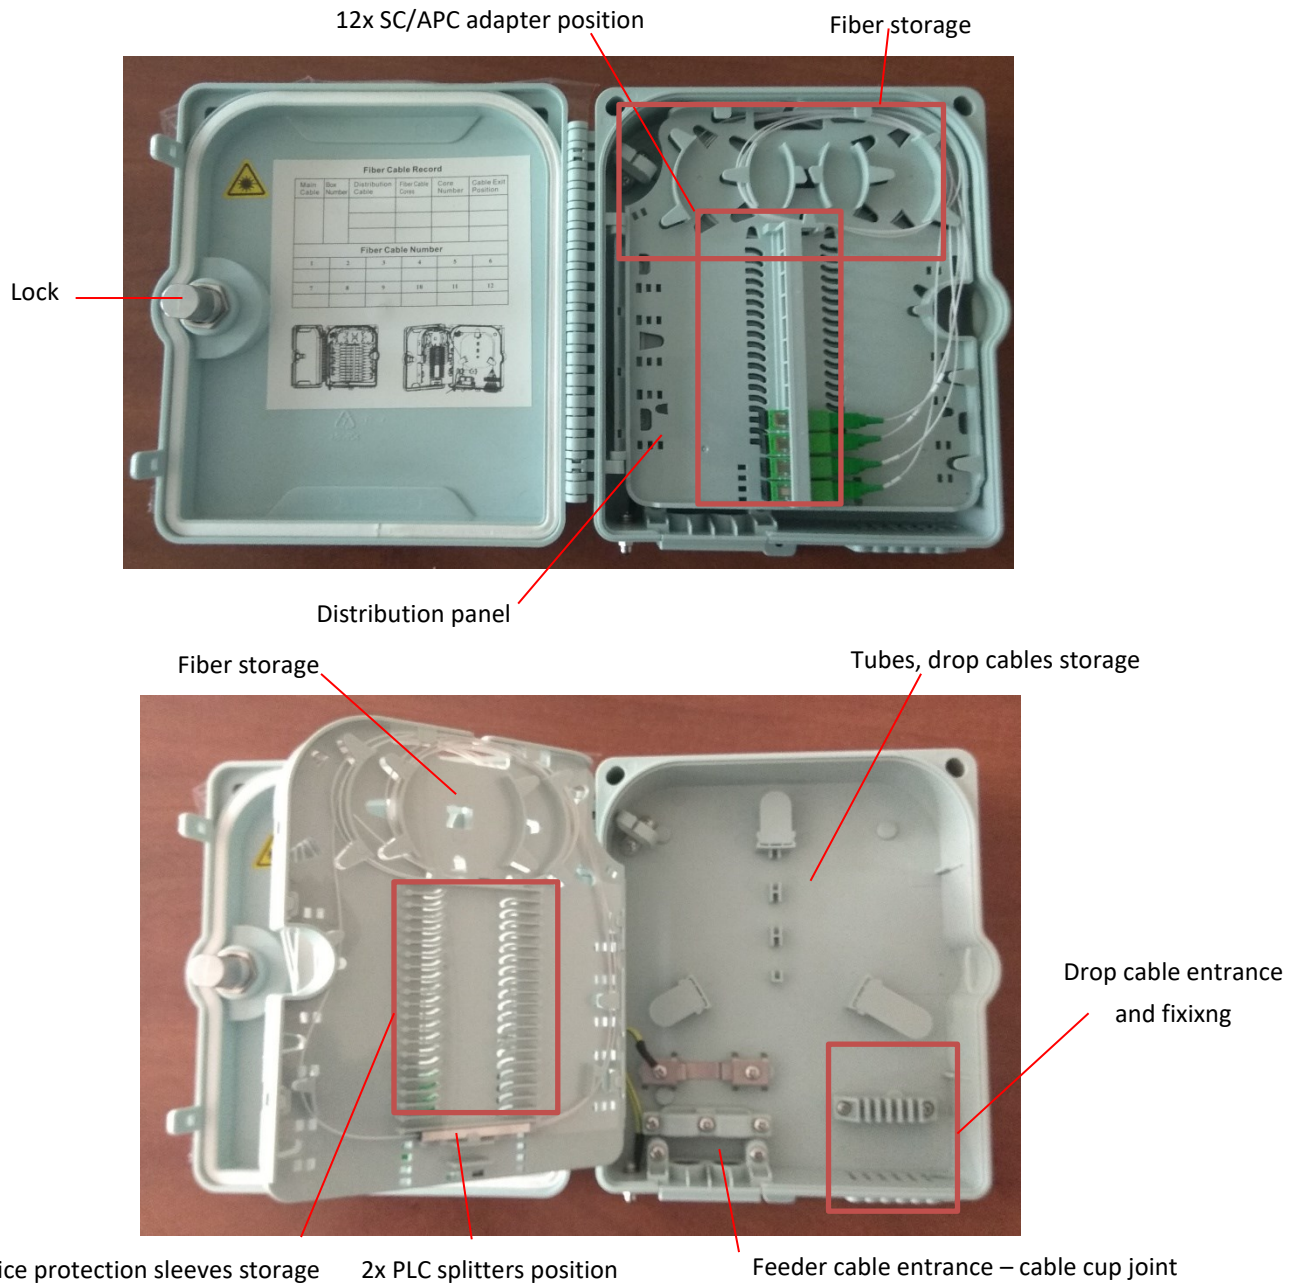

Accessories

	Name	Quantity
1	Bare fiber protection tube	0,5 m.
2	Cable tie	10 pc.
3	Splice protection sleeve	12 pc.
4	Drop cable protection tube	12 Pc.
5	Key for lock	1 pc.

